



HAMMERS AND BITS


DCS6/DCS6HD

Down Hole Hammer

FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Designed to operate at pressures up to 500 PSI (34.5 BAR)
- Ability to drill efficiently against high heads of water

AIR CONSUMPTION

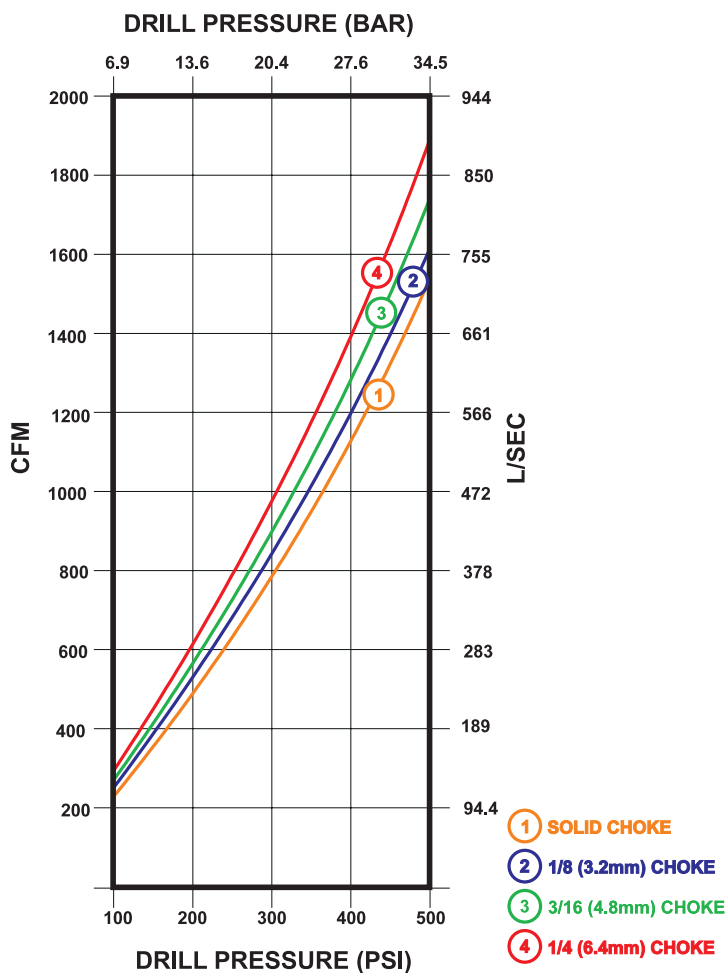

SPECIFICATIONS

Diameter	DCS6	5-1/2"	140 mm
	DCS6HD	5-3/4"	146 mm
Bore		4-1/2"	114 mm
Stroke		3-1/2"	89 mm
Weight (Hammer only)	DCS6	182 lbs.	83 kg
	DCS6HD	203 lbs.	92 kg
Length (Shoulder to Shoulder)		38-7/8"	987 mm
Length (Shoulder to Bit Face)		42-1/2"	1080 mm
A.P.I. Reg. Threads		3-1/2"	

- 1850 blows per minute at 350 PSI (23.8 BAR)
- Drills holes from 6" to 8-1/2" (152 mm - 216 mm) in diameter
- Accepts QL60 bit shank

Patent 7,422,074



Down Hole Button Bits

DCS6/DCS6HD



QL60 Bit Shank

DIAMETER
inches (millimeters)

WEIGHT*
pounds (kilograms)


FACES AVAILABLE

6" **	(152 mm)	48 lbs.	(21 kg)
6-1/8" **	(156 mm)	48 lbs.	(21 kg)
6-1/4"	(159 mm)	49 lbs.	(22 kg)
6-1/2"	(165 mm)	51 lbs.	(23 kg)
6-3/4"	(172 mm)	51 lbs.	(23 kg)
7"	(178 mm)	59 lbs.	(27 kg)
7-1/2"	(191 mm)	62 lbs.	(28 kg)
8"	(203 mm)	65 lbs.	(30 kg)
8-1/2"	(216 mm)	68 lbs.	(31 kg)


Concave



Convex



Flat



* Bit weights are approximate

** Not to be used with DCS6HD Hammer

FEATURES

- 5/8" (16 mm) diameter carbide buttons throughout face
- Carbide buttons positioned for better fracture of rock providing faster penetration rates
- Several grades and types of carbide are available
- Other bit sizes may be available upon request

For More Information Contact:

646 Thompson Road • Thompson, CT 06277 USA
Phone: (860) 923-9551 • Fax: (860) 923-2617
numa@numahammers.com • www.numahammers.com

