




DCS6 Down Hole Hammer

FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Designed to operate at pressures to 500 PSI (34.5 BAR)
- Ability to drill efficiently against high heads of water

AIR CONSUMPTION

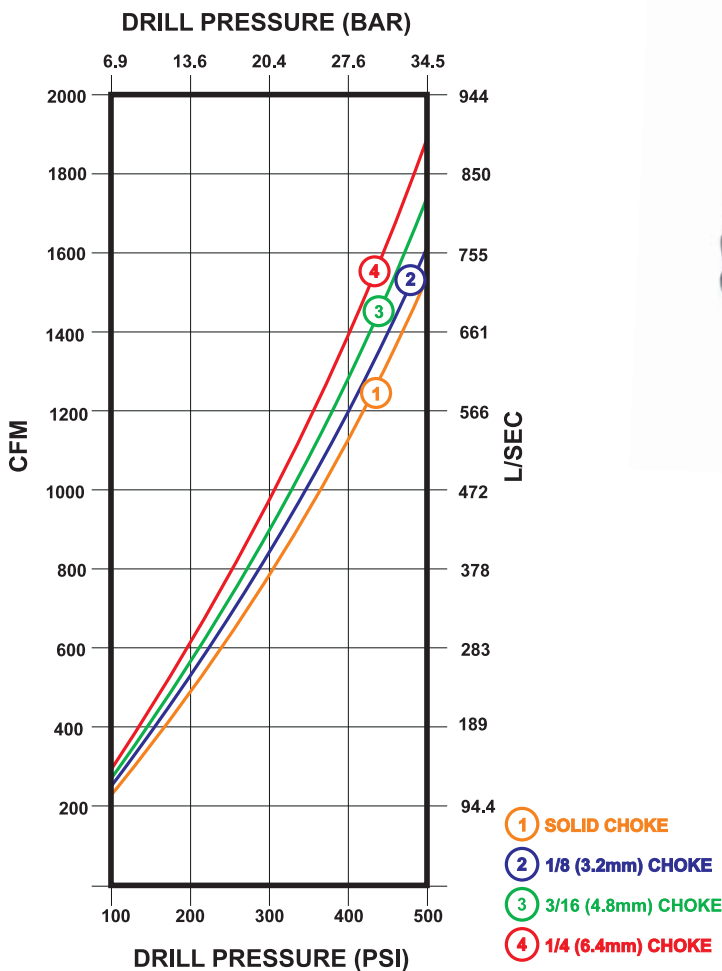


SPECIFICATIONS

Diameter	5-1/2"	140 mm
Bore	4-1/2"	114 mm
Stroke	3-1/2"	89 mm
Weight (Hammer only)	182 lbs.	83 kg
Length (Shoulder to Shoulder)	38-7/8"	987 mm
Length (Shoulder to Bit Face)	42-1/2"	1080 mm
A.P.I. Reg. Threads	3-1/2"	

- 1850 blows per minute at 350 PSI (23.8 BAR)
- Drills holes from 6" to 8-1/2" (152 mm - 216 mm) in diameter
- Accepts QL60 bit shank

Patent 7,422,074

Down Hole Button Bits

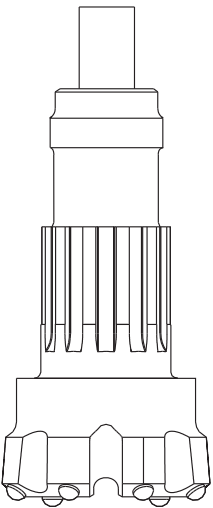DCS6	DIAMETER		WEIGHT*		FACES AVAILABLE
	inches	(millimeters)	pounds	(kilograms)	
 QL60 Bit Shank	6"	(152 mm)	48 lbs.	(21 kg)	Concave
	6-1/8"	(156 mm)	48 lbs.	(21 kg)	
	6-1/4"	(159 mm)	49 lbs.	(22 kg)	
	6-1/2"	(165 mm)	51 lbs.	(23 kg)	Convex
	6-3/4"	(172 mm)	51 lbs.	(23 kg)	
	7"	(178 mm)	59 lbs.	(27 kg)	
	7-1/2"	(191 mm)	62 lbs.	(28 kg)	Flat
	8"	(203 mm)	65 lbs.	(30 kg)	
	8-1/2"	(216 mm)	68 lbs.	(31 kg)	

* Bit weights are approximate

FEATURES

- 5/8" (16 mm) diameter carbide buttons throughout face
- Carbide buttons positioned for better fracture of rock providing faster penetration rates
- Several grades and types of carbide are available
- Other bit sizes may be available upon request

For More Information Contact:

Bob Lancaster
 Northeast USA
 (860) 933-1715

Ted Foust
 Mid-Atlantic USA
 (717) 579-7809

Carl Chidester
 Appalachian USA
 (304) 203-2408

Jeff Hay
 Southeast USA
 (478) 279-4834

Virginia Lenox
 Western USA
 (325) 456-0695

Kathy Wagoner
 Oil & Gas
 Western USA
 (325) 456-0407

Bruce Palmer
 U.S. Construction
 Latin America
 (860) 234-4823

Chris Beare
 Europe - Middle East
 Africa - India
 +44 (0) 7785 934 361

Ian Speer
 Australia
 +61 (0) 400 077 165