




Champion® RC160 Down Hole Hammer

FEATURES

- Valveless down hole hammer design
- Ability to drill efficiently against high heads of water
- Designed to operate at pressures up to 200 PSI (13.6 BAR)
- Superior directional stability in horizontal applications
- Ejecting cuttings through the collection tube eliminates traditional hole cleaning problems
- Environmentally sensitive - no foam required for hole cleaning and lubricants are not free to contaminate the formation
- Typical vertical and horizontal applications include: caissons, piles/rock sockets, tunneling under roads, foundation drilling and other jobs where large volume rock excavation is required

AIR CONSUMPTION

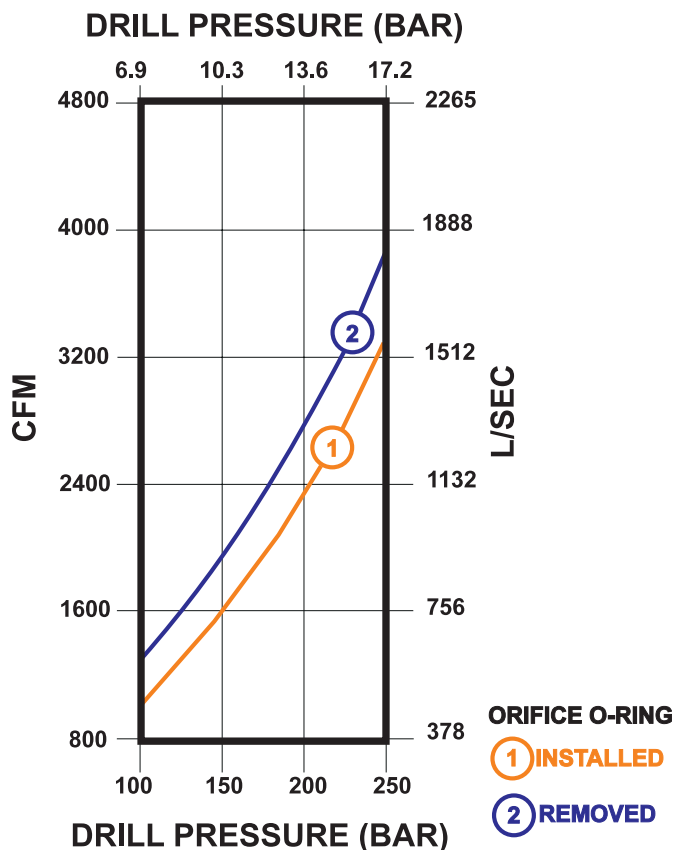

SPECIFICATIONS


Diameter	15-1/2"	394 mm
Bore	12"	305 mm
Stroke	5"	127 mm
Weight (Hammer only)	2875 lbs.	1304 kg
Length (Shoulder to Shoulder)	81-3/4"	206 cm
Length (Shoulder to Bit Face)	91-3/4"	233 cm
Several backhead threads available		

- 950 blows per minute at 200 PSI (13.6 BAR)
- Drills holes from 16" to 20" (406 mm - 508 mm) in diameter
- Accepts RC160 bit shank



Down Hole Button Bits

Champion® RC160

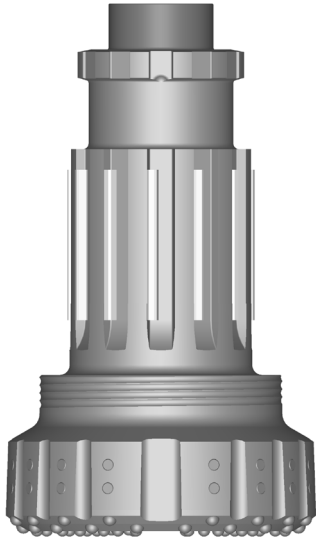

RC160 Bit Shank

DIAMETER
inches (millimeters)


16"	(406 mm)
18"	(457 mm)
20"	(508 mm)

WEIGHT*
pounds (kilograms)

950 lbs.	(431 kg)
1100 lbs.	(499 kg)
1121 lbs.	(510 kg)

* Bit weights are approximate

FACES AVAILABLE



Concave

FEATURES

- Concave face design for advanced hole cleaning capabilities
- 3/4" (19 mm), 7/8" (22 mm) and 1" (25 mm) carbide options available
- Significantly larger spline area for exceptional strength and transfer of torque
- Plate drive system for increased spline life
- Side wear buttons are standard on all bits
- Several grades and types of carbide are available
- Other bit sizes may be available upon request

For More Information Contact:

646 Thompson Road • Thompson, CT 06277 USA
Phone: (860) 923-9551 • Fax: (860) 923-2617
numa@numahammers.com • www.numahammers.com

