

Patriot® 125/125HD

OPERATIONS MANUAL

Care & Maintenance Instructions

- Do not discard this manual.
- Keep manual readily available for reference during operation or when servicing product.
- Before operation and maintenance, read and comprehend operations manual content.
- Customer Service: 800.356.NUMA or 860.923.9551
- **Email:** numa@numahammers.com
- Website: www.numahammers.com
- Mailing Address: P.O. Box 348, Thompson, CT 06277 USA

Patents: 6,883,618 7,442,074 10,612,310 11,085,242 EP 3 803 032 B1 KR-101340351 EP-2029325 CN-101448608 BR-P10711711 AU2007254317 AU2007254317 WO2007/136658



TABLE OF CONTENTS

		Pag
Section I D	escription	1
	ional Description	
	Backhead	
	Pin	
	Check Valve	
	Check Valve Spring	
	Feed Tube	
	Choke	
	Piston	
	Case	
	Snap Ring	
10.	Bit Bearing	3
	Bit Bearing Bushing (HD model only)	
	Bit Bearing Retainer	
	Bit Retaining Rings	
	Thrust Washers - Brass	
	Chuck	
	Chuck Bushing	
17.	Drive Plates	4
Section II M	laintenance	5
	sembly	
	ction	
	al Assembly	
	ner Assembly	
	lead / Feed Tube Assembly	
	· · · · · · · · · · · · · · · · · · ·	
Section III E	Parts Identification	11
	t 125/125HD Exploded View	
	umber Reference	
Faitin	uniber Reference	14
Cootion IV	Nix Consumption Chart	4=
Section iv A	Air Consumption Chart	15
Section V L	ubrication	16
Section VI S	Storage	17
	Term	
Long	Term	17
	rting	
Section VII	Button Bit Maintenance	10
	al	
	aieningening	
Snarp	ening	19
Section VIII	Patriot 125/125HD Recommended Spares	20



LIMITED WARRANTY

Numa warrants that the Product will be new and free from defects in material and workmanship under normal use as contemplated by this Contract for a period of six (6) months from the date of shipment.

Except for the foregoing warranty, Numa disclaims all warranties and representations wherever made, including warranties of merchantability, durability, length of service, or fitness for a particular purpose.

Any alteration or modification of the original product without the express written consent of Numa will void this warranty.

REMEDY

If, during such warranty period, Buyer promptly notifies Numa in writing of any defect and establishes that the above warranty is not met, Numa shall either repair or replace the Product or credit the customer, as it deems necessary to meet the warranty.

Such repair, replacement, or credit of Product shall constitute complete fulfillment of Numa's obligation under this warranty, and upon the expiration of the original warranty period, all of Numa's obligations hereunder shall terminate.

LIMITATION OF LIABILITY

Numa shall not be liable to Buyer whether in contract, in tort (including negligence and strict liability), under any warranty or otherwise, for any special, indirect, incidental or consequential loss or damage whatsoever, including (without limitation) loss arising from delay, cost or capital and loss of profits or revenues. The remedies set forth in this Contract are exclusive, and the total cumulative liability of Numa under this Contract or for any act or omission in connection therewith or related thereto, whether in contract, in tort (including negligence and strict liability), under any warranty or otherwise, is limited to the price paid by Buyer for the Product.

The WARNINGS, CAUTIONS and NOTES used throughout the text of this instruction book are defined as follows:

WARNING A specific procedure or practice that must be strictly followed,

or a specific condition that must be met, to prevent possible

bodily harm.

CAUTION A specific procedure or practice that must be strictly followed.

or a specific condition that must be met, to prevent damage

to the equipment.

NOTE Important supplemental information.

Numa®, Champion®, and Patriot® are registered trademarks of Numa.



SECTION I DESCRIPTION

GENERAL DESCRIPTION

The Patriot 125/125HD is a valveless, pneumatically operated tool designed to utilize Numa 12-1/4" to 20" (311 mm to 508 mm) diameter bits in rock formations under a wide range of operating conditions. The Patriot 125HD utilizes bits from 13" to 20" (331 mm to 508 mm).

The Patriot 125/125HD hammer design incorporates a non-reversible, hardened case. The single bore design allows for a maximum bore diameter in conjunction with optimum life against abrasion. The simple design of the Patriot 125/125HD provides performance and dependability without sacrificing tool life.

The Patriot 125/125HD is designed for universal applications using air pressure from 150 PSI to 250 PSI (10.2 Bar to 17.0 Bar) with compressors having capacities of 1300 CFM (614 Litres/Second) or more. When drilling conditions require supplementary hole cleaning, additional hole cleaning air can be passed through the hammer by utilizing an interchangeable choke. All standard hammers shipped from Numa have a blank choke installed. Refer to page 15 for correct choke selection and pages 7 and 12 to facilitate the removal and the installation of the choke.

P	atriot 12	5/125HD	
	atilot 120	_	
Weight w/o Bit:	P125	1133 lbs.	(514 kg)
	P125HD	1360 lbs.	(618 kg)
Outside Diameter:	P125	10-3/4"	(273 mm)
	P125HD	11-3/4"	(298 mm)
Hammer Length:			
Shoulder to Shoulder		66-3/4"	(170 cm)
Shoulder to Bit Face		75-3/4"	(192 cm)
Backhead API Thread		6-5/8 API R	EG

Table 1-1 General Hammer Specifications

12-1/4"	(311 mm)	433 lbs. (197 kg)	16"	(406 mm) 581 lbs.	(264 kg)
12-3/8"	(314 mm)	437 lbs. (199 kg)	17-1/2"	(445 mm) 619 lbs.	(281 kg)
13"	(330 mm)	450 lbs. (204 kg)	18"	(457 mm) 646 lbs.	(293 kg)
14"	(356 mm)	509 lbs. (231 kg)	19"	(483 mm) 781 lbs.	(354 kg)
15"	(381 mm)	533 lbs. (242 kg)	20"	(508 mm) 833 lbs.	(378 kg)

Table 1-2 General Bit Specifications

NOTE

Numa 12-1/4" to 20" (311 mm to 508 mm) bits are available in concave face design with large air flushing holes and chip ways to take advantage of the Patriot 125/125HD performance. Other sizes may be available upon request.



FUNCTIONAL DESCRIPTION

1. BACKHEAD



The backhead connects the hammer to the drill rod. It is threaded into the top end of the case with single start threads and into the drill rod with a standard 6-5/8" API REG thread. Wrench flats are provided for disassembling. A 11-3/4" (298 mm) HD backhead is available as an optional extra.

2. PIN



The pin connects and aligns the feed tube assembly into the backhead. It is made of hardened steel to insure long life.

3. CHECK VALVE



The check valve maintains pressure in the hammer when the air supply has been shut off. The pressure in the hammer balances the hydrostatic pressure in the hole thereby preventing contaminants from entering the hammer.

4. CHECK VALVE SPRING



The check valve spring provides tension under the check valve to keep it closed. It is compressed as the air is turned on.

5. FEED TUBE



The feed tube supplies the main air into the chambers located in the piston. It is located in the backhead and held in place by a pin.

6. CHOKE



The interchangeable choke is located in the tip of the feed tube and is held in place with a press fit. A set of three chokes is supplied with each hammer. By installing the correct choke, the hammer can be fine tuned to the compressor package. A hammer with a plastic feed tube does not utilize a choke. A hole can be drilled in the bottom tip of the plastic feed tube to facilitate hole cleaning, or pressure control. Use the chart located on page 15 for proper hole size.

7. PISTON



The piston functions as the only moving part in the hammer, controlling the operational air cycle. The percussive action of the piston striking the bit transfers the energy through the bit in order to fracture rock formations. A snap ring inserted in the main bore prevents the piston from sliding out of the case when the chuck, bit, bit retaining rings and bit bearing are removed.



8. CASE


NUMP. Patriot® 125

The case is designed to contain the internal parts which make up the hammer assembly. The case is non-reversible and hardened to resist wear and to extend life in abrasive conditions. A 11-3/4" (298 mm) OD HD case is also available as an optional extra.

9. SNAP RING

A snap ring positions the internal parts in the hammer and prevents the piston from falling out when the chuck, bit retaining rings, bit bearing and bit are removed.

10. BIT BEARING



11. BIT BEARING BUSHING (HD model only)

The bit bearing bushing is a nylon insert located in the bit bearing to provide a bearing surface between the upper bit shank and bit bearing.

12. BIT BEARING RETAINER

The bit bearing retainer sits in a groove in the case and retains the bit bearing.

13. BIT RETAINING RINGS

The bit retaining rings are designed to allow the bit to move between the drilling and cleaning positions and prevent the bit from coming completely out of the hammer. The bit retaining rings consist of two matched halves and are held together with the bit retaining ring o-ring.

14. THRUST WASHERS - BRASS

Two brass thrust washers, one located between the backhead and the case and one between the chuck and the case, provide for easy disassembly.




15. CHUCK




The chuck threads into the bottom end of the case. It has internal splines that mesh with the splines on the bit body to transmit rotation. A 11-3/4" (298 mm) HD chuck is available as an optional extra.

16. **CHUCK BUSHING**



17. **DRIVE PLATES**





SECTION II MAINTENANCE

DISASSEMBLY

• If at all possible, the backhead and chuck should be broken loose on the drill rig; this is much easier than trying to do so after the drill has been removed from the drill rig.

CAUTION

USE CAUTION WHEN HANDLING DOWN THE HOLE HAMMER PARTS. NUMA HAMMER PARTS ARE MANUFACTURED FROM HARDENED, HEAT TREATED MATERIALS. DROPPING OR STRIKING THESE PARTS MAY CAUSE SEVERE DAMAGE. STRIKING THE HAMMER PARTS WITH HAMMERS, CROWBARS OR LIKE INSTRUMENTS WILL VOID THE WARRANTY.


- Maintenance should be performed in a clean environment.
- Tools needed: appropriate hammer lifting device, a hammer stand, chain vise, 2" (51 mm) diameter brass rod, a press, a drift pin and a small screwdriver.
- Clean the outside of the hammer. This will insure a good surface to clamp on.
- With the hammer standing in the vertical postition, using an appropriate lifting device, unscrew and remove the chuck/bit assembly from the case.
- Remove the o-ring from the bit retaining rings.
- Remove the bit retaining rings from around the bit.
- Remove the chuck off the bit and drive plates from the bit/chuck splines careful not to drop the drive plates down the center of the bit.
- Remove the brass thrust washer from the chuck.
- Using an appropriate lifting device, unscrew and remove the backhead/feed tube assembly from the case.
- Place the hammer horizontally on a hammer stand and secure the hammer with a chain vise.



CAUTION

THE ACCEPTABLE CLAMPING AREAS START 8" (203 MM) FROM EITHER CASE END, TO AN ADDITIONAL 5" (127 MM) BEYOND THIS POINT. PLACING THE CHAIN VISE ON THE AREA OF THE CASE WHERE THE PISTON CYCLES CAN DISTORT THE CASE, RESTRICT PISTON MOVEMENT AND VOID THE WARRANTY.

- With the case in a horizontal position and using a 2" (51 mm) diameter brass rod, slide the piston out of the backhead end of the case.
- Removal of the chuck bushing is not necessary for routine maintenance. If necessary, lay the chuck on its side so that the bit end is facing you. Locate the seam in the chuck bushing. Insert a screwdriver into the slot in the middle of the seam and pry the chuck bushing from the under cut. Remove the chuck bushing from the bit end of the chuck.
- Removal of the bit bearing, bit bearing bushing (in HD model only), and snap ring from the chuck end of the case is not necessary for routine maintenance. If necessary, use a small screw driver or similar device to pick out the bit bearing retainer from the groove. Insert the bit bearing press plate into the backhead end of the case with the small diameter toward the chuck end. Using a 2" (51 mm) diameter brass rod, slide the bit bearing press plate to the chuck end of the case until it rests against the bit bearing. Remove the brass rod. Using a press, apply pressure to the bit bearing press plate and force the bit bearing and snap ring out of the chuck end of the case. Use a small screw driver or similar device to pick out the bit bearing bushing from the I.D. of the bit bearing.

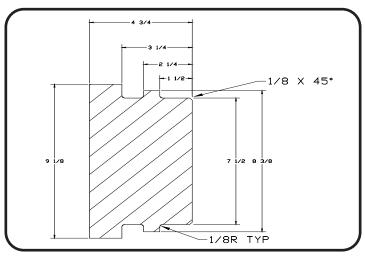

P125/P125HD Bearing Spacer/Press Plate Figure 2-1



- To disassemble the backhead / feed tube assembly, stand the backhead / feed tube assembly on a bench, with the API thread facing down.
- Using a drift pin, tap the pin out of the backhead/feed tube assembly.
- Lift the feed tube assembly out of the backhead.
- Remove the feed tube o-ring from the feed tube.
- Removal of the plug and choke are not necessary for routine maintenance. If necessary, use a 3/8" (10 mm) diameter, 24" (610mm) long rod and tap out the choke downward, toward the plug. Continue tapping both the plug and choke out of the feed tube. A hammer with a plastic feed tube does not utilize a choke.
- Remove the brass thrust washer from the backhead.
- Remove the check valve and check valve spring.
- Remove the backhead o-rings from the backhead.



INSPECTION

 All parts should be washed in a clean solvent before they are inspected and reassembled.

WARNING

USE CLEANING FLUIDS THAT ARE NONFLAMMABLE AND AVOID BREATHING THE FLUID VAPORS.

Handle all parts carefully, hardened parts may chip if dropped on a hard surface.

BACKHEAD

- Inspect the threads and pin hole for cracks and burrs.
- Remove all burrs on the thread with a fine file or emery cloth.
- Replace if necessary.

CHECK VALVE / CHECK VALVE SPRING

- The check valve should be smooth and free from abrasions.
- Replace if necessary.
- Replace the check valve spring if it is worn or broken.

FEED TUBE ASSEMBLY

- Inspect the outside diameters for nicks, burrs and scoring.
- Inspect all makeup surfaces for indentations or nicks caused by wear.
- Remove all minor irregularities with emery cloth.
- Replace if necessary.

PIN

- Inspect pin for scoring or cracks.
- Replace if necessary.



SNAP RING

- Inspect the snap ring for severe wear indications.
- Remove or round over any sharp edges.
- Replace if necessary.

PISTON

- Inspect the striking face, inside and outside diameters for nicks, scoring and cracks.
- Polish the piston with emery cloth to remove all minor irregularities, cracked pistons should be replaced.
- Wash the piston thoroughly, inside and out, to remove all emery dust.

CASE

- Inspect the outside diameter for excessive wear or cracks. Inspect the internal case bore for scoring.
- Remove all minor irregularities with fine honing stones.
- Clearance between the case and piston should not exceed .020" (0.5 mm).

BIT BEARING

- In HD model only, inspect the bit bearing bushing for cracks or irregularities. Replace if necessary.
- Inspect the inside and outside for nicks and burrs.
- Remove all internal irregularities with a polishing wheel.
- Remove all external irregularities with an emery cloth.
- Clearance between the bit bearing and the bit shank should not exceed .020" (0.5 mm).
- Replace if necessary.



BIT RETAINING RINGS

- Inspect for cracks or deformations.
- Remove all irregularities with a file or emery cloth.
- Replace if necessary.

CHUCK / CHUCK BUSHING / DRIVE PLATES

- Inspect the chuck bushing for cracks or irregularities. Replace if necessary.
- Inspect for cracks and burrs.
- For continued use, the outside diameter should be larger than the outside of the case or the same. Collar length should not be less than 5-1/4" (133 mm).

CAUTION

IF THE COLLAR LENGTH IS LESS THAN 5-1/4" (133 MM) AND THE BIT IS UNDER LOAD CONDITIONS, CONTACT BETWEEN THE SHOULDER OF THE BIT RETAINING RINGS AND THE BOTTOM OF THE BIT RETAINING RING AREA ON THE BIT, COULD CAUSE THE BIT TO FAIL IN THIS AREA.

- Torsional play in the splines should not exceed .200" (5.0 mm).
- Replace if necessary.
- Inspect the drive plates. Replace if cracked or worn.

O-RINGS

- Inspect for damage such as cracks and deformations.
- Replace if necessary.

THRUST WASHERS - BRASS

- Inspect for damage such as cracks and deformations.
- Replace if necessary.




GENERAL ASSEMBLY INSTRUCTIONS

- Assembly should be performed in a clean environment.
- All parts should be cleaned thoroughly and wiped dry before assembly.
- Oil all parts by hand using Rock Drill Oil to insure easy assembly.
- Coat all thread connections with a thread compound to allow joints to thread easily.

HAMMER ASSEMBLY

- Using the 2" (51 mm) brass rod, install the thick snap ring into the groove, located in the chuck end of the case.
- In HD model only, insert the bit bearing bushing into the bit bearing.
- Press the bit bearing in the case, until it seats against the snap ring.
- Install the round bit bearing retainer in the groove at the shoulder of the bit bearing.
- Install the thrust washer (1/8" thick on non-HD model) against the shoulder of the chuck threads and insert the chuck bushing in the ID under cut of the chuck. With the bit face down, place the chuck over the top of the bit. Align the splines and lower the chuck completely onto the bit. Rotate the chuck counterclockwise until the splines meet and insert the drive plates between the chuck and the bit splines. See Figure 2-3.
- Place the bit retaining rings, with the bit retaining ring o-ring installed, over the bit shank and on top of the chuck.

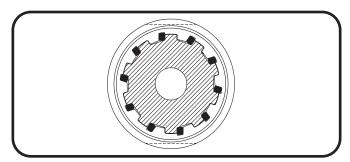

N125/P125 Drive Plate Positioning as Viewed from Top Figure 2-3.

—— Patriot[®] 125/125HD ————



BACKHEAD / FEED TUBE ASSEMBLY

- Place the backhead on the bench with the API threads facing down. Install the backhead o-rings into the grooves located on the thread diameter.
- Place the check valve and check valve spring in the backhead.
- Place the feed tube o-ring into the groove located just under the pin hole of the feed tube.
- Drop the choke into the feed tube and using the small rod, tap the choke in place. A hammer with a plastic feed tube does not utilize a choke.
- Using a drift pin, tap the plug into the feed tube until it seats against the shoulder.
- Using a rubber mallet, tap the feed tube into the backhead, aligning the hole in the feed tube with the hole in the backhead.
- Using a rubber mallet, tap the pin into the hole.
- Place the thrust washer (1/2" thick on non-HD model) over the backhead threads until it rests against the backhead shoulder.

HAMMER ASSEMBLY CONTINUED

Place the hammer horizontally on a hammer stand and secure with a chain vise.

CAUTION

THE ACCEPTABLE CLAMPING AREAS START 8" (203 MM) FROM EITHER CASE END, TO AN ADDITIONAL 5" (127 MM) BEYOND THIS POINT. PLACING THE CHAIN VISE ON THE AREA OF THE CASE WHERE THE PISTON CYCLES CAN DISTORT THE CASE, RESTRICT PISTON MOVEMENT AND VOID THE WARRANTY.

- Slide the piston in the backhead end of the case. Push the piston all the way to the chuck end. The piston should ride in the case very smoothly.
- Using an appropriate lifting device, stand the hammer case up in a vertical position with the chuck end on the ground.
- Using an appropriate lifting device, lower the backhead / feed tube assembly into the case. Thread the backhead / feed tube assembly into the case until it shoulders up.
- Using an appropriate lifting device, lower the hammer assembly over the chuck/bit assembly. Thread the chuck/bit assembly into the case and hand tighten. The chuck should shoulder against the thrust washer and case, with no gap present.




CAUTION

DUE TO CLOSE TOLERANCES BETWEEN THE PATRIOT 125/125HD INTERNAL PARTS AND THE CASE, NUMA CAN NOT ACCEPT RESPONSIBILITY FOR DAMAGE CAUSED BY WELDING ON THE CASE OD. WELDING ON THE CASE CAN CREATE DISTORTION, CAUSE PREMATURE FAILURE AND VOID THE WARRANTY. CONTACT NUMA FOR SPECIAL INSTRUCTIONS IF WELDING THE CASE BECOMES UNAVOIDABLE.



Page 14 -

SECTION III PARTS IDENTIFICATION EXPLODED VIEW

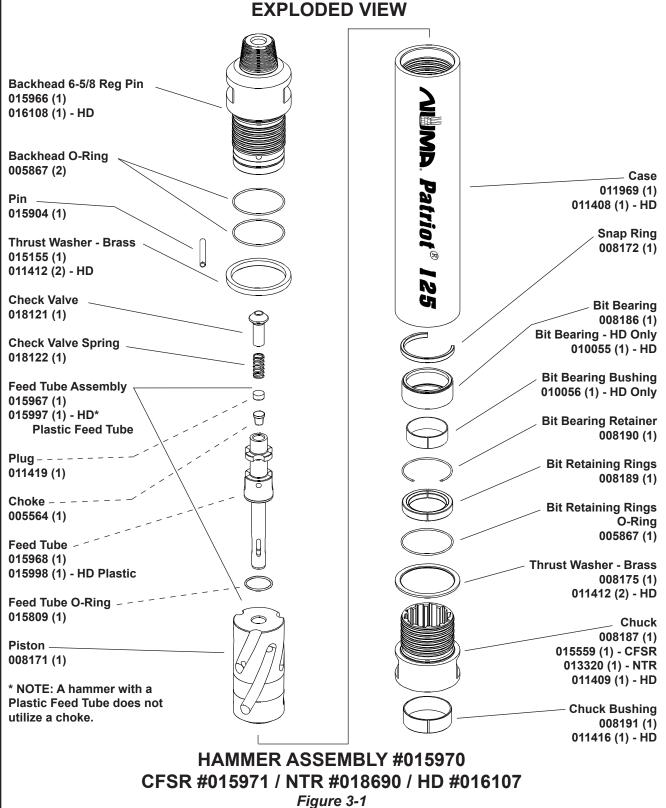


—— Patriot® 125/125HD -



SECTION IV AIR CONSUMPTION CHART PATRIOT 125

DRILL PRESSURE (BAR)

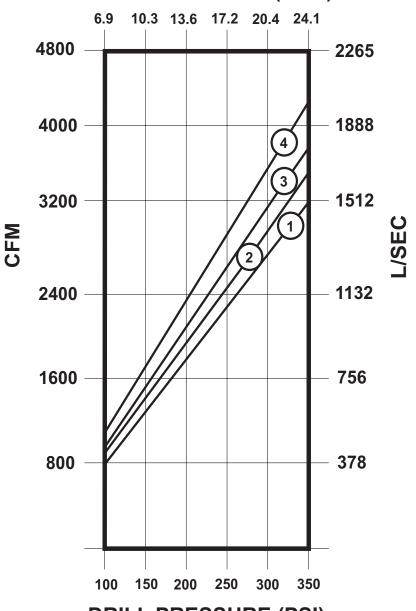

DRILL PRESSURE (PSI)

- SOLID CHOKE
- (3) 3/8 (9.5mm) CHOKE

2 1/4 (6.4mm) CHOKE 4 1/2 (12.7mm) CHOKE * Operation Above 250 PSI (17 BAR) Is Not Recommended.

- **Patriot[®] 125/125HD** — Page 15 -11/06/2024 -



SECTION V LUBRICATION

The Patriot 125/125HD hammer requires a continuous supply of the correct type Rock Drill Oil. The Patriot 125/125HD hammer consumes at least 5 quarts (5 litres) of Rock Drill Oil per hour in order to maintain adequate lubrication. When using Biodegradable Oils, you must increase the total amount by 25%. See table 5-1 for recommended Rock Drill Oil.

	Modium CAE 20	Hoovy CAE 50
	Medium SAE 30	Heavy SAE 50
Shell	Air Tool Oil S2 A 150	Air Tool Oil S2 A 320
Texaco / Caltex	Rock Drill Lube 100	Rock Drill Lube 320
Chevron	Vistac 150	Vistac 320
Conoco	Conoco 150	Conoco 320
Numa Bio Blend	RDP 150	RDP 320

Table 5-1 **Recommended Rock Drill Oil**

CAUTION

ROCK DRILL OILS ARE THE ONLY ACCEPTABLE LUBRICANTS. SAE 50 ROCK DRILL OIL SHOULD BE USED IN AMBIENT TEMPERATURES OF 80° FAHRENHEIT (27° CELSIUS) OR HIGHER. CONTACT NUMA FOR ACCEPTANCE OF ALTERNATIVE ROCK DRILL LUBRICANTS.

CAUTION

THE PATRIOT 125/125HD HAMMER, AS WITH ANY MACHINE, REQUIRES CONTINUOUS LUBRICATION. THE FAILURE TO SUPPLY ADEQUATE LUBRICATION TO THE HAMMER CAN CAUSE PREMATURE FAILURE AND MAY VOID THE WARRANTY.



SECTION VI STORAGE

When storing a Patriot hammer, it is important to take the necessary steps in order to insure a smooth operation after restarting.

When the hole is completed and the hammer is to be inactive for several weeks or longer the following steps should be followed:

Each drill rod should be blown clear of all water. During this process, turn on the in line lubricator and blow until the Rock Drill Oil can be seen from the bottom end of each drill rod. In addition, each rod (pin and box end) should be wiped clean and capped to prevent foreign contaminants from sticking to the connector ends.

SHORT TERM STORAGE

When the Patriot hammer will be stored for only a short period of time the following steps should be taken:

- Blow the hammer clear of all water.
- Pour one quart of Rock Drill Oil into the backhead.
- Turn the air on and cycle for 10 seconds. This will lubricate the internal parts.
- Cap the backhead and chuck end.
- Store the hammer horizontally in a dry environment.

LONG TERM STORAGE

When the Patriot hammer will be stored for a long period of time the following steps should be taken:

- Blow the hammer clear of all water.
- If at all possible, the backhead and chuck should be broken loose on the drill rig, this is much easier than trying to do so in the shop.
- Disassemble the hammer.
- Inspect and wipe all the parts clean.



- Lubricate all the internal parts with Rock Drill Oil. See table 5-1 on page 16 for suitable **Rock Drill Oils.**
- Cap the backhead and chuck ends.
- Store the hammer horizontally in a dry environment.

RESTARTING

Before restarting the hammer after prolonged periods of inactivity, disassemble and inspect all internal hammer parts.

If any internal hammer parts have oxidized, use an emery cloth to polish each part. Wash each hammer part, wipe dry, relubricate with rock drill oil and reassemble the hammer.

CAUTION

FAILURE TO CHECK INTERNAL PARTS BEFORE RESTARTING THE HAMMER MAY CAUSE SERIOUS DAMAGE TO THE HAMMER.



SECTION VII BUTTON BIT MAINTENANCE

GENERAL

Numa button bits are designed for fast penetration and long life. Keeping the carbide buttons sharp has a direct effect on both the penetration and the tool life.

As the bit wears flat, spots develop on the carbide buttons. These flat spots increase stress on the buttons causing the bit to work harder, which may cause button failure. Bit sharpening can minimize these problems.


Gauge buttons will usually show the most wear and should be used to determine the frequency of bit sharpening. When the flats on the gauge buttons become a maximum of 1/8" (3 mm) wide it is time to resharpen. Refer to figure 7-1.

SHARPENING

The following tools are required to resharpen the bit:

- Hand grinder (20,000 r.p.m.)
- Silicon carbide wheel 1" (25 mm) diameter, 60 80 grit
- Bit stand
- Pencil

Place a mark on the center of the button flat. Grind the button to its original shape leaving the mark untouched. Refer to figure 7-1. It is important to leave the center of the flat untouched to insure concentricity.



Button Resharpening Figure 7-1

11/06/2024 — Patriot® 125/125HD — Page 19



SECTION VIII RECOMMENDED SPARES PATRIOT 125/125HD

Product Description	Part Number	Class 1	Class 2
Backhead 6-5/8 Reg Pin	015966	0	1
Backhead O-Ring	005867	2	4
Thrust Washer Backhead End - Brass	015155	1	2
Pin	015904	1	2
Check Valve	018121	1	2
Check Valve Spring	018122	1	2
Feed Tube Assembly	015967	1	2
Plug	011419	0	1
Choke (Blank)	005564	0	1
Feed Tube	015968	1	2
Feed Tube O-Ring	015809	1	2
Piston	008171	0	1
Case	011969	0	1
Snap Ring	008172	1	2
Bit Bearing	008186	0	1
Bit Bearing Retainer	008190	1	2
Bit Retaining Rings	008189	1	2
Bit Retaining Rings O-Ring	005867	1	2
Thrust Washer Chuck End - Brass	008175	1	2
Chuck	008187	0	1
Chuck Bushing	008191	1	2
Choke Set (not for Plastic Feed Tube)	007121	1	2
Choke Blank - installed in hammer	005564	0	1
Choke 1/4"	007122	0	1
Choke 3/8"	008045	0	1
Choke 1/2"	007123	0	1
Alternate Parts			
Backhead 6-5/8 Reg Pin (HD)	016108	0	1
Thrust Washer - Brass (HD)	011412	2	4
Feed Tube Assembly (HD - Plastic)	015997	1	2
Plug	011419	0	1
Feed Tube	015998	1	2
Feed Tube O-Ring	015809	1	2
Case (HD)	011408	0	1
Bit Bearing (HD only)	010055	0	1
Bit Bearing Bushing (HD only)	010056	1	2



Product Description	Part Number	Class 1	Class 2
Chuck (HD)	011409	0	1
Chuck Bushing (HD)	011416	1	2
Chuck CFSR	015559	0	1
Chuck NTR	013320	0	1

For Complete Hammer Assembly #015970 CFSR #015971 / NTR #018690 / HD #016107

Table 8-1

Class 1	NOTE Represents a user of a Patriot 125/125HD hammer that has readily available spare parts.
Class 2	Represents a user of a Patriot 125/125HD hammer that does not have readily available spare parts.



NOTES



NOTES

- 11/06/2024 — Patriot® 125/125HD — Page 23